

# KCSAZ-XXN

三通梭阀


## 说明 DESCRIPTION

Single ball shuttle valve, 3port jack  
单球梭阀, 3口插孔

## 工作 OPERATION


The valve will allow flow from the higher pressure of port 1 or 3 to the port 2.  
The valve is commonly used to direct oil from the pressure side of a bidirectional hydraulic motor to a pressure-released hydraulic brakd,  
当1口超过3口的压力时, 1到2打开。  
当3口超过1口的压力时, 3到2打开  
一般用于自动开启液压马达制动器, 比较液压, 马达油口压力, 压力高的油口与液压制动器释放端连接。

## 符号 SYMBOL

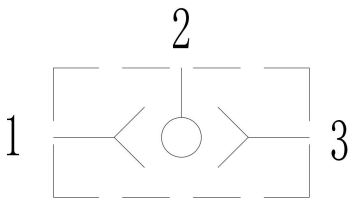


## 技术参数 SPECIFICATIONS


工作压力 (Operating pressure):	350bar
流量 (Flow):	4.7L/min
内泄漏 (Internal Leakage):	5 drops/min. (滴/分) max. at 350bar
温度 (Temperature):	-40° C to + 120° C
过滤 (Filtration):	参考过滤要求 (Reference filter requirements)
油液 (Fluids):	Mineral-based fluids with viscosities of 7.4 to 420 cSt. (矿物油粘度)
插孔 (Cavity):	T-163A

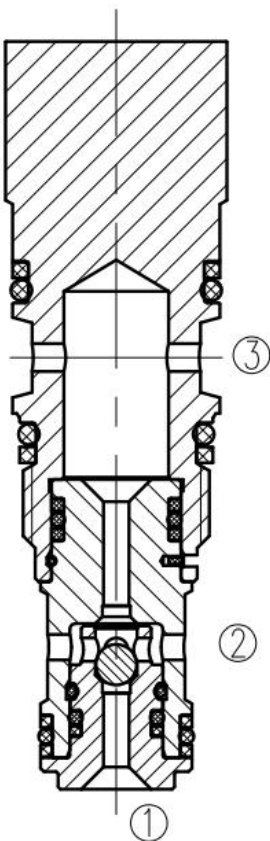

## 压力-流量曲线 PRESSURE DROP VS. FLOW

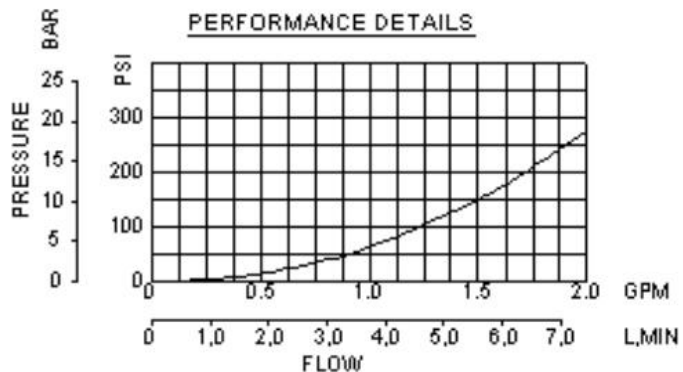

订货代号 TO ORDER



① 公司代号  
Company code

② 控制方式 Control  
X= 常规 Standard Pilot

③ 密封件 Sealing ring  
N 丁腈橡胶 (标准型)  
BUNA N (Std.)  
V 氟橡胶 Fluorocarbom

安装尺寸 INSTALLATION DIMENSIONS

